


Technical Data Sheet

Rosenberger

CABLE ASSEMBLY
HSD FEMALE /USB FEMALE

LD5-CA004-XXX-Y-YY

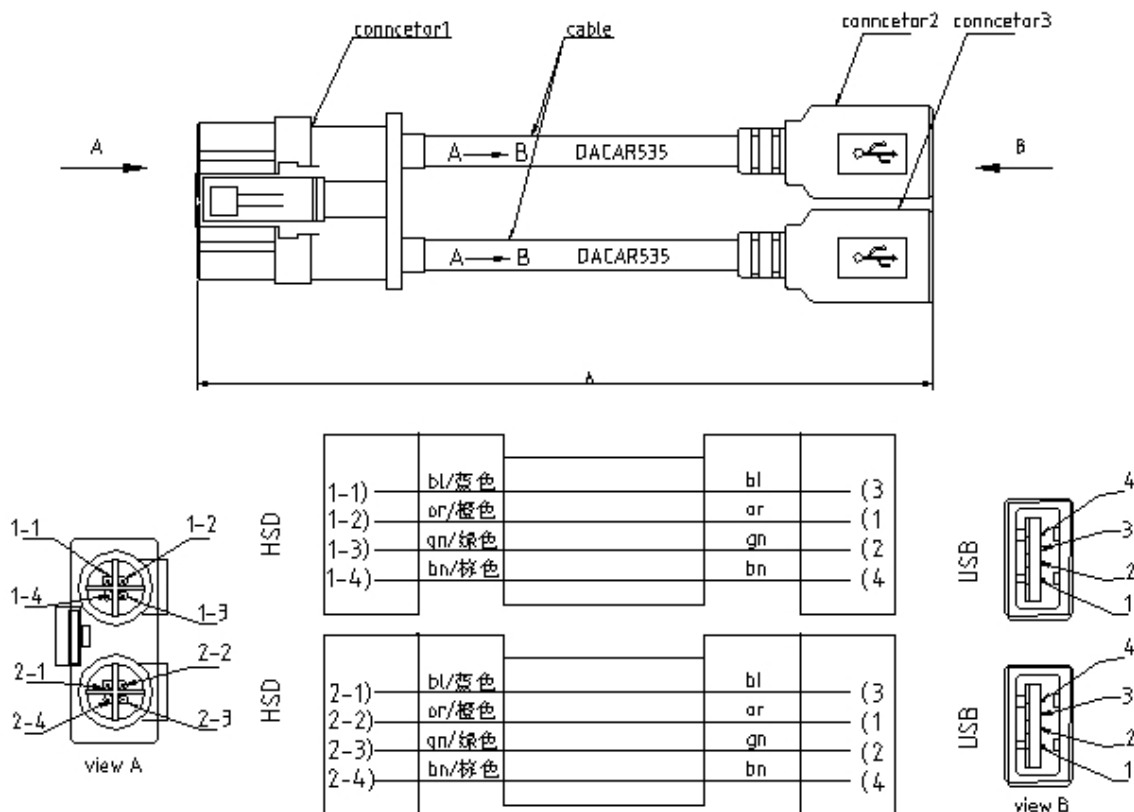

All dimensions are in mm; tolerances according to ISO 2768 c

Parts

Connector 1(double)	HSD FEMALE
Connector 2(single)	USB FEMALE
Connector 3(single)	USB FEMALE
Cable	Dacar 535 x2pcs
Label	NA

Available Variants Weight

Customer Type	Rosenberger Type	Connector1 colour	Connector2,3 colour	A Length [mm]	weight (g) /pcs
NA	LD5-CA004-1000-E-AA	Green	Black	1000±10	TBD

Electrical data

Test voltage DC750 V

Environmental data

Temperature range -40°C~+105°C
RoHS compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Check	Approved	Date	Rev.	Engineering change number	Name	Date
Lijing	25/08/14	tiger	Zhj	25/08/14	a	Original design	Lijing	25/08/14

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de
www.rosenberger.de

Rosenberger Asia Pacific Electronic Co., Ltd., China
Tianzhu Airport Industrial Zone, Beijing, China
Tel.: +86 10 80481995
Fax: +86 10 80497052
www.rosenbergerap.com
Email: info@rosenbergerap.com

Page
1 / 1