


Technical Data Sheet

Rosenberger

CABLE ASSEMBLY
HSD FEMALE / FEMALE

LD5-CA122-XXX-Y-Y-CSC1C2

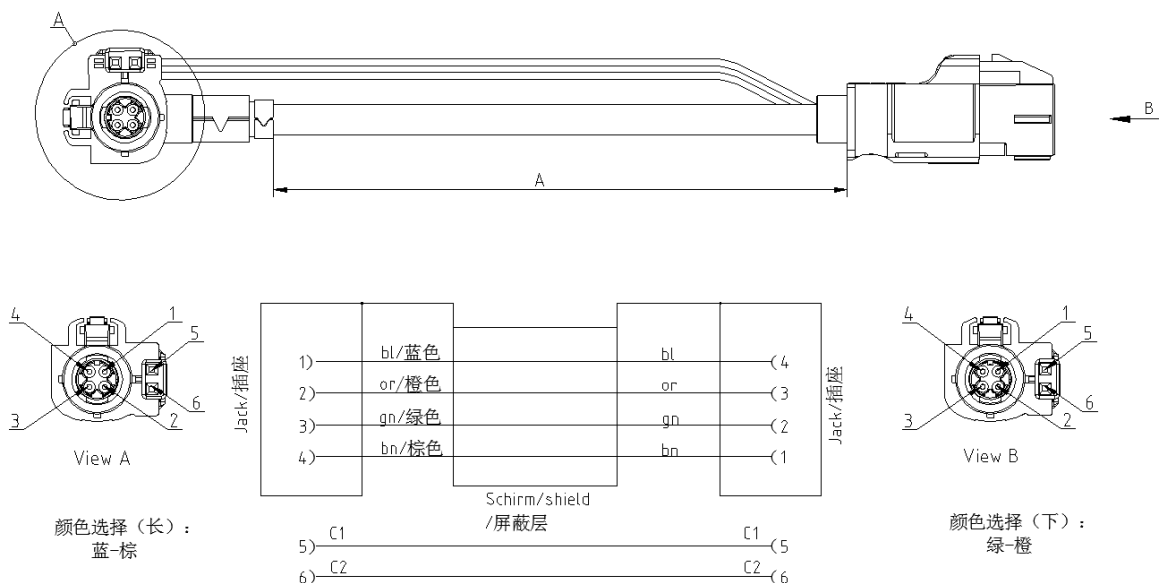

All dimensions are in mm; tolerances according to ISO 2768 c

Parts

Connector A (single female)	99K20D-1D5A5-y
Connector B (single female)	99K10D-1D5A5-y
Cable	Dacar 535
MQS cable	FLRY 0.5*2

Available Variants Weight

Customer Type	Rosenberger Type	Connector colour	A Length (mm)	weight (g) /pcs
NA	LD5-CA122-0160-D-D-50RDBK	Claret Violet - Claret Violet	160±5	TBD

Electrical data

Test voltage DC750 V

Mechanical data

Pull out strength cable $F > 110N$

Environmental data

RoHS compliant
Temperature range $-40^{\circ}C$ - $+105^{\circ}C$

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Check	Approved	Date	Rev.	Engineering change number	Name	Date
Wangning	25/09/17	Lijing	Qilinhu	25/09/17	b00	2017-C126	Wangning	25/09/17

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de
www.rosenberger.de

Rosenberger Asia Pacific Electronic Co., Ltd., China
Tianzhu Airport Industrial Zone, Beijing, China
Tel.: +86 10 80481995
Fax: +86 10 80497052
www.rosenbergerap.com
Email: info@rosenbergerap.com

Page
1 / 1